


Standard Duty Ring-Type Drive Head (Banjo Head)

Maximum allowed torque:

600 Nm (440 lb.ft)

Weight: 5kg (11 lb)

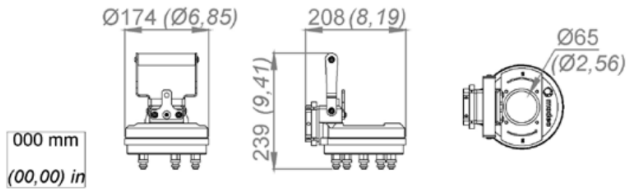

DESCRIPTION

Essential for all rising stem handwheels, the Standard duty banjo drive head caters for all stems up to a maximum diameter of 63mm (2.48"). It can also operate all clamping systems for handwheel and other interfaces.

What's more, it brings additional reduction which means you can multiply the actuator's torque by 4 and reduce the speed by the same factor. Perfect for difficult or stiff handwheels.

With a maximum torque of 600 Nm (440 lb.ft), the Standard duty banjo head can be mounted quickly and easily on all Easy duty actuators and on the following Standard duty actuators: HL83S-035, JA73S-077 and PY68S-087.


Reference : BJH01

Standard Duty Ring-Type Drive Head (Banjo Head)

Maximum allowed torque:

900 Nm (660 lb.ft)

Weight: 8.6kg (19 lb)

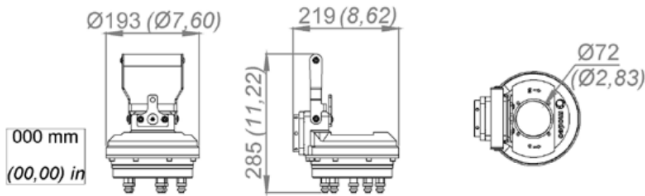

DESCRIPTION

The Heavy duty banjo drive head should be used for very high torques. It caters for rising stems up to a maximum diameter of 70mm (2.75") and is compatible with all clamping systems for handwheel and other interfaces.

It brings additional reduction which means you can multiply the actuator's torque by 3 and reduce the speed by the same factor.

With a maximum torque of 900 Nm (660 lb.ft), the Heavy duty banjo head can be mounted quickly and easily on all Easy duty and Standard duty actuators.


Reference : BJH02

Right Angle Drive Head RA30

Maximum allowed torque:

630 Nm (465 lb.ft)

Weight : 5.2 kg (11.5 lb)

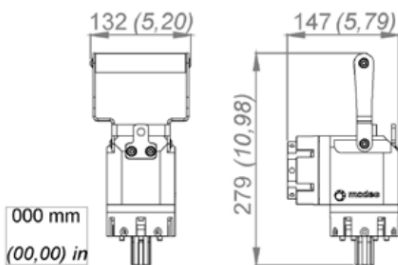

DESCRIPTION

The RA30 right angle drive head can be positioned at 90° to the actuator providing optimal positioning for the operator. It is suitable for high torques (up to 630 Nm (465 lb.ft)).

The right angle drive head RA30 can be mounted quickly and easily on all our actuators.

Reference : RA30



South East Asia

Total Lockout (Safety)
Level 36, Menara Citibank
165 Jalan Ampang
50450, Kuala Lumpur
Malaysia

Tel: +603 2169 7022

E-mail: sales@totallockout.com

Global Headquarters

Total Lockout (Safety) Ltd
Unit 10 Warner Drive
Springwood Industrial Estate
Braintree, Essex, CM7 2YW
United Kingdom

Tel: +44 (0)1376 325506

Fax: +44 (0)1376 347484

E-mail: sales@totallockout.com



North America & Canada

Total Lockout (Safety) LLC
4500 140th Avenue North
Suite 101
Clearwater, FL 33762
United States of America

Tel: (727) 608-4325

Fax: (727) 538 4237

E-mail: sales@totallockout.com

The information provided in this document is for general guidance only. The specifications provided are from the manufacturers information. This document is not intended as a substitute for and is not to be used for determining the suitability or reliability of these products for specific user applications. It is the duty of any such user to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Total Lockout (Safety) Ltd shall not be responsible or liable for misuse of the information contained herein.